



## ÇENELI KIRICI BB 200

Versatile unit with a focus on fineness

The Jaw Crusher BB 200 is a floor model designed for a throughput of up to 300 kg/h, suitable for many typical crushing tasks. It accepts feed sizes up to 90 mm. The gap width can be set stepless from 0-30 mm.


Depending on the sample material, particle sizes down to 2 mm can be obtained, resulting in a crushing ratio of 45. Its versatile usage includes continuous pre-and fine crushing in one step or process-line versions.

The RETSCH jaw crusher series is available in 8 different sizes. Throughput and final fineness depend on the crusher type, selected gap width and breaking properties of the sample material.

Robust design, simple handling and cleaning are the features of the RETSCH jaw crusher models. Small amounts of sample are processed batchwise; for larger amounts the crushers can be operated continuously.

## ROBUST & VERSATILE

- | Excellent crushing performance
- | Wide range of materials for contamination free grinding
- | Wear compensation with zero-point adjustment
- | Continuous gap width setting
- | Easy-to-clean crushing chamber
- | Suitable for continuous grinding
- | Connector for dust extraction

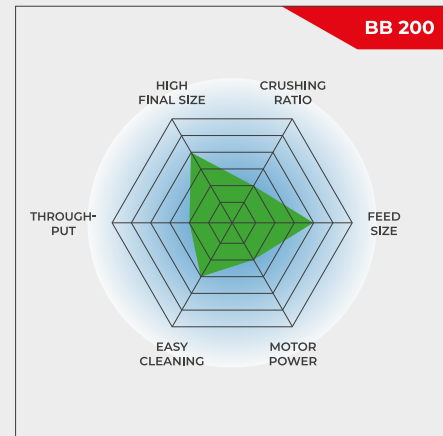

Versatile unit with a focus on fineness

### ÇENELI KIRICI BB 200

## SUPERIORITY IN DETAIL

Robust design, simple handling and cleaning are the features of the BB 200 jaw crusher. For small sample amounts of up to 5 L the BB 200 can be used batch-wise; for larger amounts it can be operated continuously.

The crushed sample is collected in a removable collector. For larger amounts or continuous crushing operations, the sample collector can be replaced by customer-specific solutions (e.g. a belt conveyor).


A Belleville spring washer integrated in the spindle adjustment provides additional overload protection. The eccentric spindle which moves the crushing arm is driven by a robust brake motor via V-belts. The largest belt pulley also acts as the flywheel to ensure uniform and smooth operation. The BB 200 jaw crusher features maintenance- & lubricant-free sliding bearings.

ÇENELI KIRICI BB 200

## **WEAR COMPENSATION BY ZERO-POINT ADJUSTMENT**

Depending on the material and the throughput, sooner or later the breaking jaws will start to show signs of wear. This means that the set breaking jaw distance or the crushing gap will increase with time. To still be able to obtain reproducible crushing results this wear must be compensated.

RETSCH jaw crushers can be continuously adjusted, allowing for compensation of breaking jaw wear. This is done by slowly altering the gap width setting with the motor running until the breaking jaws are heard to come into contact. The new zero point thus obtained is saved by readjusting the scale.



ÇENELI KIRICI BB 200

## USER CONVENIENCE COMBINED WITH MAXIMUM SAFETY

Safety is a top priority with RETSCH jaw crushers. The feed hopper with splash-back protection cannot be accessed by hand. A safety switch and the brake motor ensure an immediate stop if the unit is opened or switched on incorrectly.

For easy cleaning of the crushing chamber, the hinged hopper can be removed in a few simple steps. The jaw crushers run very smoothly and quietly and are virtually maintenance-free.



FOR SAFE AND EFFICIENT CRUSHING PROCESSES

## ACCESSORIES FOR THE JAW CRUSHER BB 200

Breaking jaws and wearing plates are available in five different materials to be selected depending on the sample and the analysis to be carried out:

- | Manganez çelik
- | Paslanmaz çelik
- | Tungsten karbür
- | Ağır metal içermeyen öğütme için çelik



ÇENELI KIRICI BB 200


## JAW CRUSHERS FOR SPECIAL REQUIREMENTS

Apart from the standard model, the BB 200 jaw crusher is also available in special versions adapted to particular application requirements.

## HEAVY-METAL FREE CRUSHING

All jaw crushers are available in a heavy-metal-free version. The BB 200 can also be supplied in a special version suitable for crushing semiconductor materials. This includes plastic lining of feed hopper and receptacle as well as breaking jaws and wear plates of tungsten carbide.


Thus, the sample does not come into contact with metal materials at any point and no abrasion of the grinding tools impairs the purity of the sample material.

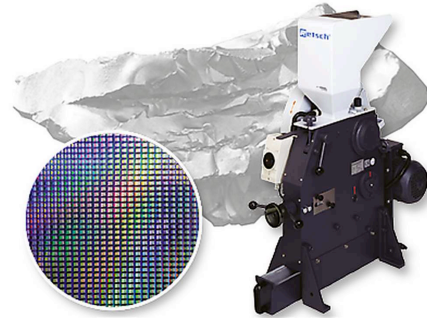

## CONTINUOUS PRE- AND FINE GRINDING

For the rapid, continuous grinding of large quantities of coarse material to analytical fineness, the combination of the jaw crusher BB 200 and the RETSCH Disc Mill DM 200 is the perfect solution.

The crusher is mounted above the disc mill on a frame and both instruments are connected by a chute. With this construction, samples of up to 90 mm feed size can be ground down to 100 microns in one single step.

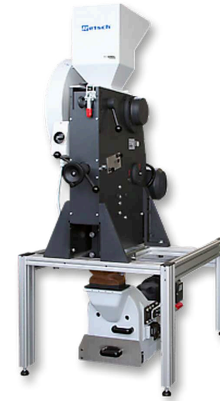

## PROCESS-LINE VERSION

The BB 200 jaw crusher is also available in a version suitable for continuous size reduction in online operation, e. g. for quality control during the production process. For these purposes it is supplied without feed hopper and motor protection switch. The voltage of the three-phase AC motor is selected in accordance with customer requirements.



ÇENELİ KIRICI BB 200

## TIPIK ÖRNEK MALZEMELER

RETSCH's powerful jaw crushers are ideally suited for preliminary crushing of construction materials, ores, granite, oxide ceramics, quartz, slag, silicon, coal, tungsten alloys, cement clinker, etc.



*Beton*



*jade*



*Cam*



*coal*


Örnek hazırlama göreviniz için en iyi çözümü bulmak için uygulama veri tabanımızı ziyaret ediniz

ÇENELİ KIRICI BB 200

## FONKSİYON PRENSİBİ

BB 200, sağlam ve güçlü bir kırıcıdır. Beslenen malzeme, huni şeklindeki yerden geçerek, kırılacak hazneye ulaşır. Boyut küçültme, sabit çene ve eksantrik mil etrafında hareket eden bir çene arasında gerçekleşir.

Eliptik hareket sonrası, yerçekimi etkisi ile düşen numune kırılmaya başlar, kısa süre içinde altındaki toplama kabında birikmeye başlar. Çene mesafesi ayarı, işlem süresince yapılarak en uygun numune boyutuna ulaşılabilir.

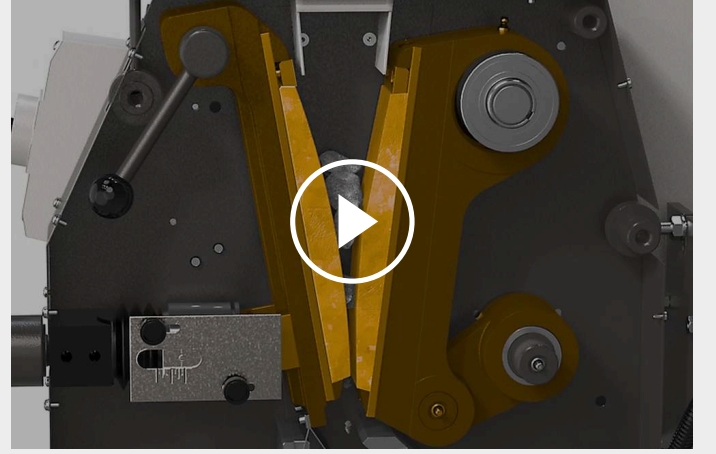

[Videoyu izlemek için tıklayın](#)

ÇENELİ KIRICI BB 200

**TEKNİK VERİ**

<b>Uygulamalar</b>	kaba ve ön öğütme
<b>Uygulama alanı</b>	inşaat malzemesi ..., kimya / plastik
<b>Besleme malzemesi</b>	sert, kırılğan, orta sert, sert
<b>Boyut küçültme prensibi</b>	basınç
<b>Malzeme giriş büyüklüğü</b>	< 90 mm
<b>Çıkış büyüklüğü</b>	< 2 mm
<b>Çıktı*</b>	300 kg/s
<b>Öğütücü elemanların malzemesi</b>	mangan çeliği, paslanmaz çelik, tungsten ...
<b>Çene genişliği</b>	90 x 90 mm
<b>Çene aralığı genişliği ayarı</b>	0 - 30 mm
<b>Çene aralığı genişliği göstergesi</b>	skala
<b>Sıfır noktası ayarı</b>	evet
<b>Askılı besleme hunisi</b>	evet
<b>Toz çekme ünitesi</b>	evet
<b>Bakım ve yağlama gerektirmeyen kayar yatak</b>	evet
<b>Üretim hattı versiyonu</b>	opsiyonel
<b>Kollektör kapasitesi</b>	5 l
<b>Tahrik</b>	1-faz motor / 3-faz motor
<b>Motor gücü</b>	1.5 kW
<b>Elektriksel veriler</b>	farklı voltajlar
<b>Güç bağlantısı</b>	1-faz / 3-faz
<b>Koruma kodu</b>	IP 54
<b>G x Y x D kapalı</b>	450 x 1160 x 900 mm
<b>Net ağırlık</b>	~ 300 kg
<b>Standartlar</b>	CE

\* besleme malzemesi ve cihaz yapılandırmasına / ayarlarına bağlıdır

[www.retscheom.tr/bb200](http://www.retscheom.tr/bb200)

## SIPARIŞ BİLGİSİ

### ÇENELİ KIRICI BB 200




Çeneli Kırıcı BB 200, kırma çeneleri ve aşınma plakaları ile komple

				kırma çeneleri / aşınma plakaları
20.053.0001		BB 200	3/N~ 400 V, 50 Hz	manganlı çelik / paslanmaz çelik
20.053.0002		BB 200	3/N~ 400 V, 50 Hz	paslanmaz çelik / paslanmaz çelik
20.053.0003		BB 200	3/N~ 400 V, 50 Hz	tungsten karbür / paslanmaz çelik
20.053.0043		BB 200	3/N~ 400 V, 50 Hz	tungsten karbür / tungsten karbür
20.059.0001	 <b>i</b>	BB 200	3~ 400 V, 50 Hz	tungsten karbür / tungsten karbür, -SR - numune ile temas eden tüm parçalar ağır metal içermez
20.053.0018		BB 200	3/N~ 400 V, 50 Hz	çelik 1.1750 / çelik 1.0344, -SR - ağır metal kirliliği olmadan öğütme için

aynı fiyata diğer elektrikli versiyonlar mevcuttur

### ENTEGRASYON İÇİN ÇENELİ KIRICI BB 200 VERSİYONU

Üreticinin EC makine direktifine göre beyan ettiği, üç fazlı motorlu (talep üzerine voltajlar), besleme hunisi ve koruyucu motor anahtarı olmadan müşterinin bulunduğu yerdeki bir sisteme entegrasyon için versiyon

20.058.1001		BB 200, manganlı çelik / paslanmaz çelik
20.058.1002		BB 200, paslanmaz çelik / paslanmaz çelik
20.058.1003		BB 200, tungsten karbür / paslanmaz çelik




### AKSESUARLAR ÇENELİ KIRICI BB 200

İRMA ÇENELERİ BB 200


1)

22.048.0004		Kırma çeneleri manganlı çelik 1 çift
22.048.0005		Kırma çeneleri stainless steel 1 çift
22.048.0006		Kırma çeneleri tungsten carbide 1 çift
22.048.0024		Kırma çeneleri tungsten carbide 1 çift, çeneli kırıcı 20.059.0001
22.048.0026		Kırma çeneleri NiHard 4 1 çift
22.048.0018		Kırma çeneleri çelik 1.1750 1 çift, ağır metal kirliliği olmadan öğütme için

#### BB 200 AŞINMA PLAKALARI

22.711.0003		Aşınma plakaları stainless steel 1 çift
22.711.0010		Aşınma plakaları tungsten carbide 1 çift
22.711.0006		Aşınma plakaları çelik 1.0344 1 çift, ağır metal kirliliği olmadan öğütme için

#### DIĞER AKSESUARLAR BB 200

22.351.0003		V-kayışı, 1 set (3 adet)
02.824.0054		BB 200 / Diskli Öğütücü DM 200 kombinasyonu için çerçeve